


## Sfere di lavaggio fisse / Sprayballs

opzione spalla piatta/  
flat shoulder

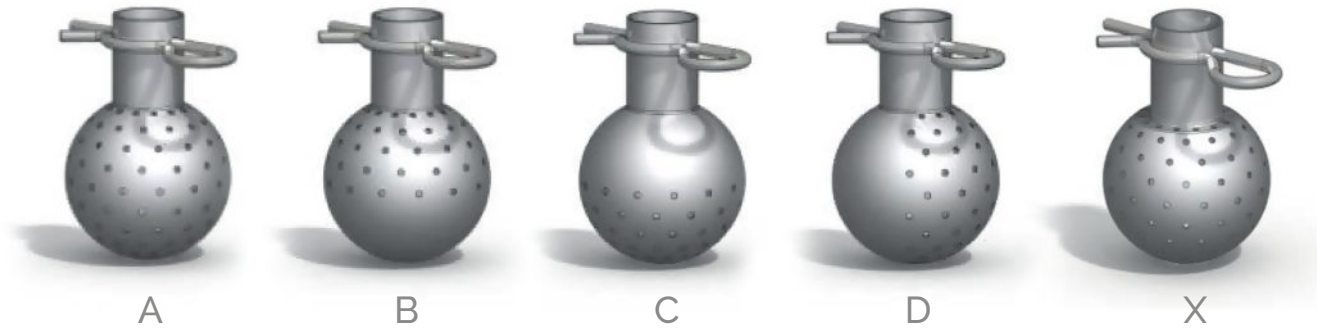

ART.	Ø ATTACCO	Ø SFERA	Ø FORI	PRESSIONE	PORTATA m <sup>3</sup> /h	RAGGIO AZIONE m
CODE	COUPLING Ø	BALL Ø	HOLES Ø	PRESSURE	CAPACITY m <sup>3</sup> /h	RANGE m
1A 1B - 1C - 1D	28 x 26	65 mm	2.5 mm	1 bar	15.7 10.2 - 10.5 - 10.1	1.8 3.0 - 3.2 - 2.9
2A 2B - 2C - 2D	40.5 x 38.5	65 mm	2.5 mm	1 bar	18.8 8.4 - 11.2 - 10.2	2.6 2.0 - 3.7 - 3.0
3A 3B - 3C - 3D	3/4" GF	65 mm	2.5 mm	1 bar	13.2 8.7 - 9.2 - 9.2	1.3 2.2 - 2.5 - 2.5
4A 4B - 4C - 4D	40.5 x 38.5	50 mm	1.6 mm	1 bar	6.6 4.0 - 3.7 - 3.9	1.9 2.8 - 2.3 - 2.6
5A 5B - 5C - 5D	42.4 x 1.6	65 mm	2.5 mm	1 bar	18.8 8.4 - 11.2 - 10.2	2.6 2.0 - 3.7 - 3.0
6A 6B - 6C - 6D	32 x 30	65 mm	2.5 mm	1 bar	17.9 9.3 - 10.5 - 10.1	2.3 2.5 - 3.2 - 3.0
7A 7B - 7C - 7D	38 x 36	65 mm	2.5 mm	1 bar	18.3 8.1 - 11.6 - 10.4	3.0 2.4 - 4.9 - 3.9
8A 8B - 8C - 8D	22 x 20	50 mm	1.6 mm	1 bar	5.5 3.4 - 3.2 - 3.5	2.5 3.8 - 3.4 - 4.1
9A 9B - 9C - 9D	1/2" GF	50 mm	1.6 mm	1 bar	5.4 3.0 - 3.1 - 3.3	2.4 3.0 - 3.2 - 3.6
10A 10B - 10C - 10D	28 x 26	50 mm	1.6 mm	1 bar	7.2 4.7 - 4.7 - 4.5	4.3 7.2 - 7.2 - 6.7
11A 11B - 11C - 11D	1" 1/4 GF	90 mm	2.5 mm	1 bar	29.8 12.7 - 15.9 - 15.9	3.1 2.2 - 3.4 - 3.1
12A 12B - 12C - 12D	38 x 36	90 mm	2.5 mm	1 bar	24.2 13.4 - 15.9 - 14.2	2.0 2.4 - 3.4 - 3.1
14A 14B - 14C - 14D	60.3 x 52.8	120 mm	2 mm	1 bar	19 10.2 - 8.9 - 10.0	2.0 2.3 - 1.7 - 2.2
15A 15B - 15C - 15D	22 x 20	40 mm	1.6 mm	1 bar	3.7 2.3 - 2.3 - 2.4	3.8 5.5 - 5.9 - 6.1
16A 16B - 16C - 16D	22 x 20	40 mm	1.3 mm	1 bar	5.1 3.0 - 3.1 - 3.1	4.7 6.4 - 7.0 - 7.1
17A 17B - 17C - 17D	1/4" GF	28 mm	1.3 mm	1 bar	1.8 1.2 - 1.4 - 1.4	1.0 1.6 - 2.2 - 2.3